


60217J	3/8 HLW SET DROP-IN
---------------	----------------------------

UPC: 08593704998
 UNSPSC: 31162101
 Standard Qty: 50
 Master Carton Qty: 300
 Country of Origin: TAIWAN
 Hollow-Set Drop In Anchor for 3/8" Threaded Rod, 7/8" Length, Internally Threaded, Zinc Plated, Includes Setting Tool for Quick Install, 100/Jar

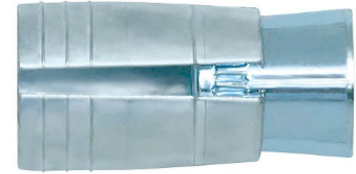

Product Attributes		Compliance Information
Brand Name	Minerallac	Buy America Act Compliant: No
Sub Brand	Cully	Buy American Act Compliant: No
Type	Hollow Set Drop-In Anchor	RoHS Compliant: Yes
Application	Designed for anchoring in hollow base materials such as hollow concrete block and precast hollow core plank. Can also be used in solid base materials.	UL Listed: No
Materials	Zamac alloy anchor body with a carbon steel cone	UL Code:
Anchor Diameter	3/8"	Proposition 65
Outside Diameter	5/8"	This product is in compliance with Prop65; it is not known to contain any chemicals associated with this regulation.
Overall Length	1/- 5/16"	
Ultimate Load Capacities (2000 PSI Concrete)	1370 lbs Tension, 2550 lbs Shear (1" Embed Depth)	
Uses	Anchoring to concrete block, suspending conduit, fire sprinklers, cable trays and strut, suspended lighting, pipe supports.	
Allowable Load Capacities (2000 PSI Concrete)	345 lbs Tension, 640 lbs Shear (1" Embed Depth)	

Minerallac Company

Tel: 800-927-3293
 Fax: 800-824-8942
www.minerallac.com

WARRANTY DISCLAIMER The information, data and recommendations contained herein may not be all inclusive or specific to your situation, and should only be used as a guide. The information is furnished upon the condition that the person receiving it shall make his/her own determination of the suitability of the product for his/her particular use and on condition that they assume the risk of the use thereof.

With respect to this publication and the product related thereto, except otherwise expressly provided by Manufacturer in writing, MANUFACTURER MAKES NO EXPRESS OR IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER EXPRESS OR IMPLIED WARRANTY.

Remedy/Liability Limits The exclusive remedy for losses or damages resulting from this publication or the related product (including claims based on contract, negligence, strict liability or other legal theories) shall be limited to, at Manufacturer's sole election, one of the following: 1. Refund of purchase price paid by buyer or user for product bought, or 2. Replacement of amount of product used.

Manufacturer shall not be liable for losses or damages resulting from use of this publication or handling or use of this product, IN NO CASE SHALL MANUFACTURER BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OR LOSSES, INCLUDING WITHOUT LIMIT, HEALTH RELATED DAMAGES OR INJURIES, OR LOST PROFITS.

The terms of this Warranty Disclaimer and Remedy/Liability Limits cannot be varied by any written or verbal statements or agreements. No employee or sales agent of Manufacturer or the seller is authorized to vary or exceed the terms of this Warranty Disclaimer or Limitation of Remedies in any manner.