



Black Claw™

By **Minerallac** Company

FULL CROSS PRODUCT CATALOG



Black Claw™

By **Minerallac** Company

TABLE OF CONTENTS

CONDUIT/CABLE

- CONDUIT CLIP **5**
- FLEX CONDUIT & WIRE SUPPORT **6**
- BAT WING CONDUIT CLIP **7**
- BAT WING CABLE CLIP **8**
- BAT WING MULTI-FUNCTION CLIP **8**
- BAT WING CLIP ASSEMBLIES **9-10**
- ROOF BLOCKS **10**
- FLEXIBLE CONDUIT/CABLE FLANGE CLIP **11**
- CONDUIT WALL SUPPORT **12**
- BEAM MOUNT CONDUIT CLIP ASSEMBLY **12-13**
- BEAM MOUNT FLEX CONDUIT CLIP ASSEMBLY **14**
- FLANGE MOUNT CONDUIT CLIP ASSEMBLY **15-16**
- FLANGE MOUNT FLEX CONDUIT CLIP ASSEMBLY **17**
- CONDUIT & BOX SUPPORT FASTENERS **18-19**
- CONDUIT SUPPORT WITH ANGLE BRACKET **19**
- CONDUIT SUPPORT ASSEMBLY **20**
- BEAM MOUNT CONDUIT AND BOX SUPPORT **21**

HANGING HARDWARE

- WIRE MC/AC CABLE HANGER **23**
- ROD/WIRE BRACKET SUPPORT **23**
- ROD/WIRE BEAM ASSEMBLIES **24**
- STRAP HANGERS **25**
- ROD HANGERS **25**

VOICE/DATA & LOW VOLTAGE

- CABLE SUPPORT J-HOOKS **27**
- J-HOOK ANGLE BRACKET ASSEMBLY **27**
- J-HOOK SET SCREW BEAM CLAMP ASSEMBLIES **28-29**
- J-HOOK MULTI-PURPOSE CLIP ASSEMBLY **30**
- J-HOOK Z PURLIN HANGER ASSEMBLY **30**
- J-HOOK VERTICAL FLANGE ASSEMBLY **31**
- J-HOOK FLANGE CLAMP ASSEMBLY **32**
- J-HOOK BEAM CLAMP ASSEMBLY **33**
- MOUNTING BRACKETS **34**

TABLE OF CONTENTS

BRIDLE RINGS **35**
BRIDLE RINGS WITH SADDLE **36**
D-RINGS **37**

BEAM/PURLIN

BEAM CLAMPS **39**
SIDE MOUNT FLANGE CLAMP **40**
BEAM CLAMP CONDUIT/CABLE HANGER ASSEMBLIES **40-41**
BEAM CLAMP FLEX CONDUIT ASSEMBLY **41**
Z PURLIN/ VERTICAL FLANGE HANGERS **42-43**
Z PURLIN STRAP ASSEMBLIES **43**
Z PURLIN CONDUIT ASSEMBLIES **44**
Z PURLIN ROD ASSEMBLIES **45**
VERT FLANGE ROD ASSEMBLIES **46**
VERT FLANGE FLEX CABLE ASSEMBLIES **47**

STUD & DRYWALL

CABLE PROTECTION **49**
THROUGH STUD CONDUIT/CABLE SUPPORT **49**
FLEXIBLE CONDUIT/CABLE FASTENER **50**
CONDUIT TO STUD SUPPORT **50**
BOX TO STUD FASTENER **51**
BOX TO STUD SUPPORT **51**
CONDUIT TO STUD FASTENER **52**
FAR SIDE BOX SUPPORT **52**
PLASTIC FAR SIDE BOX SUPPORT **53**
UNIVERSAL METAL STUD GROMMET **53**
PLASTIC OPEN SIDE METAL STUD BOX SUPPORT **53**
BOX MOUNTING BRACKET **54-55**
OUTLET RETAINER **55**
BOX STABILIZER SUPPORT **56**
OLD WORK BOX SUPPORT **56**
FAN BOX SUPPORT **57**

TABLE OF CONTENTS

ACOUSTICAL

- BOX TO T-BAR FASTENER **59**
- DROP WIRE CLIPS **59**
- LIGHTING SUPPORT ASSEMBLY **60**
- LIGHTING TROFFER FASTENER **60**
- T-BAR DROP WIRE CLIP **60**
- T-BAR HANGER CLIPS **61**
- T-BAR FASTENERS **61**
- T-BAR FASTENERS FOR CONDUIT **62-63**

HARDWARE/ACCESSORIES

- BOX TO BAR FASTENER **65**
- PIPE SLEEVE POSITIONER **65**
- WAFER HEAD LATH TEK SCREWS **65**
- STANDOFF BRACKET **66**
- BRACKETS **66**
- WING NUT WASHER **66**

CONDUIT/ CABLE



CONDUIT/CABLE

CONDUIT CLIP

HIC75



No fastener required

¼" mounting hole

Ultimate Static Load Limit:

25 lbs Vertical Position

15 lbs Horizontal Position

Fits EMT	Fits Rigid/IMC	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
½	-	HIC50	8P	BP8	100
¾	½	HIC75	12P	BP12	100
1	¾	HIC100	16P	BP16	100

KC38



No fastener required

¼" mounting hole

Static Load Limit:

100 lbs Vertical Position

25 lbs Horizontal Position

Fits Conduit	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
⅜	KC38	6M	BG6	100
½, ¾	KC1234	812M	BG812	100
1	KC1	16M	BG16	100
1¼	KC114	20M	BG20	100
1½	KC112	24M	BG24	100
2	KC2	32M	BG32	100

Fits Conduit With Thread Impression for ¼"-20	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
⅜	KC38T	6M4I	BG64T	100
½, ¾	KC1234T	812M4I	BG8124T	100

CONDUIT/CABLE

FLEX CONDUIT & WIRE SUPPORT

NEW! CS4



NEW! MCACS50



NEW! MCACS101



NEW! MCAC2



NEW! FS5MC



NEW! MC0SS



NEW! FS6NMB



NEW! FS4NMB



NEW! FCWS6



Attaches sheathed non-metallic and MC/AC cable to wood or metal studs

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Holds up to 4 MC/AC cables or 4 12-3 non-metallic sheathed cables	CS4	CER4	-	100
Holds up to 6 non-metallic sheathed cable or up to 4 MC cables	FCWS6	CJ6	BRC6M, BRCJ	100
Double run 14-2 to 10-3 MC/AC	MCAC2	MAC2	BX4M	100
14-3 to 10-2 MC/AC up to 4	MCACS50	MCS50	BRC51	100
14-3 to 10-2 MC/AC up to 8	MCACS100	MCS100	BRC52	50
10-3 to 8-3 MC/AC up to 7	MCACS101	MCS101	BRC53	50
Holds up to 4 runs of 12/2, 12/3, 10/2 and 1 run of 10/3 MC/AC	FS5MC	-	-	50
1 ¼ metal stud support adaptor for open side of stud for use with FS5MC, screws included	MC0SS	-	-	25
Holds up to 4 runs of 14/2, 12/2, 10/2 and 2 runs of 14/3, 12/3 non-metallic sheathed cable, wood stud	FS6NMB	CS2 [†]	BRC2	50
Holds up to 4 runs of 14/2, 12/2, 10/2 or 2 runs of 14/3, 12/3, 10/3 non-metallic sheathed cable, nail included, wood stud	FS4NMB	CS14 [†] , MCS20W [‡]	BRC1, BPSTKR [‡]	50

Cross Reference = Arlington[†], IDEAL[‡], Gardner Bender[‡]

CONDUIT/CABLE

BAT WING CONDUIT CLIP

FS2



Supports conduit and all types of cable from rods, wire or flanges

***For horizontal applications only**

Static Load Limit:

25 lbs Vertical Flange

50 lbs Vertical Wire or Rod

100 lbs Horizontal Flange

Conduit Size	#10 & #12			Std Pkg
	Wire	#8 & #9 Wire	3/16" to 1/4" Rod	
1/2 EMT	FS1	FS1	FS1	100
1/2 RIGID	FS1	FS2	FS2	100
3/4 EMT	FS2	FS2	FS2	100
3/4 RIGID	FS2	FS2	FS3	100
1 EMT	-	FS3	FS3	100
1 RIGID	-	-	-	100
1 1/4 EMT	-	FS4	FS4	100

Conduit Size	Flange			Std Pkg
	1/8" to 1/4"	5/16" to 3/8"	7/16" to 1/2"	
1/2 EMT	FS1	FS2	FS2	100
1/2 RIGID	FS2	FS2	FS3	100
3/4 EMT	FS2	FS3	FS3	100
3/4 RIGID	FS3	FS4*	FS4*	100
1 EMT	FS3	FS4*	FS4*	100
1 RIGID	FS4*	FS4*	FS4*	100
1 1/4 EMT	FS4	-	-	100

Cross Reference		
Minerallac PN	Caddy PN	B-Line PN
FS1	K8	BW8
FS2	K12	BW12
FS3	K16	BW16
FS4	K20	BW20

CONDUIT/CABLE

BAT WING CABLE CLIP

FSBX



Clip for MC, AC, or BX. Supports cable from #12 to #8 wire in horizontal or vertical position. Fits cable O.D.'s from .433 to .535

NOTE: These products are designed for positioning only

No load rating

Cross Reference		
Minerallac PN	Caddy PN	B-Line PN
FSBX	KX	BW4
FS1	K8	BW8

Cable Size	#12 Wire	#10 Wire	#8 & #9 Wire	Std Pkg
14-2 Cable	FSBX	FSBX	FSBX	100
14-3 Cable	FSBX	FSBX	FSBX	100
12-2 Cable	FSBX	FSBX	FSBX	100
12-3 Cable	FSBX	FS1	FS1	100

BAT WING MULTI-FUNCTION CLIP

APS



Attaches conduit hanger, bridle ring or box to flanges, wire or rod

Static Load Limit:

20 lbs Vertical Position

50 lbs Horizontal Position

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Fits #12 thru #8 wire Fits 1/8" to 3/8" flange Fits 1/4" to 3/8" rod	APS	4Z34, 6Z34	BW2 BW6	100

CONDUIT/CABLE

BAT WING CLIP ASSEMBLIES

NEW! MCACS50APS



Supports MC/AC cable from flange, wire or rod

Fits #12 thru #8 wire

Fits 1/8" to 3/8" flange

Fits 1/4" to 3/8" rod

Fits Conduit	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
14-3 to 10-2 MC/AC cable up to 4	MCACS50APS	MCS504Z, MCS506Z	BRC51W2, BRC51W6	25

NEW! EDWCAPS



Electrical drop wire identify clip

Attaches to T-bar

Fits	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
#12 thru 3/8" rod	EDWCAPS	EC3114Z34, EC3116Z34	BA311W4, BA311W6	100

NEW! APSMC2



APSKC1



Supports conduit & cable from flange, wire or rod

Fits #12 thru #8 wire

Fits 1/8" to 3/8" flange

Fits 1/4" to 3/8" rod

Fits Conduit	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/2, 3/4	APSKC1234	4Z34812M, 6Z34812M	BG812W2, BG812W6	100
1	APSKC1	6Z3416M, 4Z3416M	BG16W6, BG16W2	100
14-2 to 10-3 MC/AC	APSMC2	MAC24Z34, MAC26Z34	BX4MW2, BX4MW6	100

CONDUIT/CABLE

BAT WING CLIP ASSEMBLIES

APS75



Supports conduit from flange, wire or rod

Fits #12 thru #8 wire

Fits 1/8" to 3/8" flange

Fits 1/4" to 3/8" rod

Static Load Limit:

15 lbs Vertical Position

25 lbs Horizontal Position

Fits		Cross Reference			Std Pkg
EMT	Rigid/IMC	Minerallac PN	Caddy PN	B-Line PN	
1/2	-	APS50	4Z348P, 6Z348P	BP8W2, BP8W6	100
3/4	1/2	APS75	4Z3412P, 6Z3412P	BP12W2, BP12W6	100
1	3/4	APS100	4Z3416P, 6Z3416P	BP16W2, BP16W6	100

ROOF BLOCKS

NEW! RSB081PG



Provides rooftop support for conduit and pipe

Total length = 10 1/2 in.

UV resistant foam

Height (in.)	Channel	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
4 13/16	1 13/16	RSB081PG	PSF10C	DB10	5
5 5/8	1-5/8	RSB162PG	-	-	5
6 7/16	2-7/16	RSB244PG	PSF10D	DB610	5

CONDUIT/CABLE

FLEXIBLE CONDUIT/CABLE FLANGE CLIP

F2A



Supports flexible conduit and all types of cable from flanges

Made from high-carbon steel and zinc plated

Description		Cross Reference			Std Pkg
AC/MC Cable O.D.	Flange Size	Minerallac PN	Caddy PN	B-Line PN	
.218-.281	1/16-3/16	F2A	SC2A	BXS67	100
.312-.375	1/16-3/16	F2B	SC2B	BXS89	100
.375-.437	1/16-3/16	F2C	SC2C	BXS1011	100
.468-.562	1/16-3/16	F2D	SC2D	BXS1214	100
.500-.718	1/16-3/16	F2E	SC2E	BXS1519	100
.750-.937	1/16-3/16	F2F	SC2F	BXS2024	100
.968-1.250	1/16-3/16	F2G	SC2G	BXS2530	100
.218-.281	3/16-9/32	F4A	SC4A	BXM67	100
.312-.375	3/16-9/32	F4B	SC4B	BXM89	100
.375-.437	3/16-9/32	F4C	SC4C	BXM1011	100
.468-.562	3/16-9/32	F4D	SC4D	BXM1214	100
.500-.718	3/16-9/32	F4E	SC4E	BXM1519	100
.750-.937	3/16-9/32	F4F	SC4F	BXM2024	100
.968-1.250	3/16-9/32	F4G	SC4G	BXM2530	100
.218-.281	5/16-1/2	F8A	SC8A	BXL67	100
.312-.375	5/16-1/2	F8B	SC8B	BXL89	100
.375-.437	5/16-1/2	F8C	SC8C	BXL1011	100
.468-.562	5/16-1/2	F8D	SC8D	BXL1214	100
.500-.718	5/16-1/2	F8E	SC8E	BXL1519	100
.750-.937	5/16-1/2	F8F	SC8F	BXL2024	100
.968-1.250	5/16-1/2	F8G	SC8G	BXL2530	100

CONDUIT/CABLE

CONDUIT WALL SUPPORT

CS100



Attaches conduit to metal or wood studs with screw or nail

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
½ & ¾ EMT 1-½ Box	CS1234	CS812	BB38	100
½ & ¾ EMT 2-½ Box	CS1234D	CS812D	BB38D	100
1 EMT 2-½ Box	CS100	CS16	BB38D	100

BEAM MOUNT CONDUIT CLIP ASSEMBLY

BC1875



Suspends conduit from bottom of beam

Conduit clip rotates 360°

Installs with hammer only

Static Load Limit: 25 lbs

Fits Flange	Fits EMT	Fits Rigid/IMC	Cross Reference			Std Pkg
			Minerallac PN	Caddy PN	B-Line PN	
⅛-¼	½	-	BC1850	8P24	BP8U24	100
⅛-¼	¾	½	BC1875	12P24	BP12U24	100
⅛-¼	1	¾	BC18100	16P24	BP16U24	100
⅝-½	½	-	BC51650	8P58	BP8U58	100
⅝-½	¾	½	BC51675	12P58	BP12U58	100
⅝-½	1	¾	BC516100	16P58	BP16U58	100

CONDUIT/CABLE

BEAM MOUNT CONDUIT CLIP ASSEMBLY

BC18KC38



Suspends conduit from bottom of beam

Conduit clip rotates 360°

Installs with hammer only

Static Load Limit: 75 lbs

Fits Flange	Fits Conduit	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/8-1/4	3/8	BC18KC38	6M24	BG6U24	100
1/8-1/4	1/2, 3/4	BC18KC1234	812M24	BG812U24	100
1/8-1/4	1	BC18KC1	16M24	BG16U24	100
1/8-1/4	1 1/4	BC18KC114	20M24	BG20U24	100
1/8-1/4	1 1/2	BC18KC112	24M24	BG24U24	100
1/8-1/4	2	BC18KC2	32M24	BG32U24	100
5/16-1/2	3/8	BC516KC38	6M58	BG6U58	100
5/16-1/2	1/2, 3/4	BC516KC1234	812M58	BG812U58	100
5/16-1/2	1	BC516KC1	16M58	BG16U58	100
5/16-1/2	1 1/4	BC516KC114	20M58	BG20U58	100
5/16-1/2	1 1/2	BC516KC112	24M58	BG24U58	100
5/16-1/2	2	BC516KC2	32M58	BG32U58	100
9/16-3/4	3/8	BC916KC38	6M912	BG6U912	100
9/16-3/4	1/2, 3/4	BC916KC1234	812M912	BG812U912	100
9/16-3/4	1	BC916KC1	16M912	BG16U912	100
9/16-3/4	1 1/4	BC916KC114	20M912	BG20U912	100
9/16-3/4	1 1/2	BC916KC112	24M912	BG24U912	100
9/16-3/4	2	BC916KC2	32M912	BG32U912	100

CONDUIT/CABLE

BEAM MOUNT FLEX CONDUIT CLIP ASSEMBLY



NEW! BC18MC2



Provides support from beam for double runs of 14-2 to 10-3 MC/AC cable

Clip rotates 360°

Static load limit: 75 lbs

Fits Flange	Cross Reference			
	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
1/8 - 1/4	BC18MC2	MAC224	BX4MU24	100
5/16 - 1/2	BC516MC2	MAC258	BX4MU58	100
3/8 - 3/4	BC916MC2	MAC2912	BX4MU912	100



NEW! BC18MCS50



Provides support from beam for multiple runs of 14-3 to 10-2 MC/AC cable up to 4 runs

Clip rotates 360°

Static load limit: 75 lbs

Fits Flange	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/8 - 1/4	BC18MCS50	MCS5024	BRC51U24	25
5/16 - 1/2	BC516MCS50	MCS5058	BRC51U58	25
3/8 - 3/4	BC916MCS50	MCS50912	BRC51U912	25



NEW! BC18MCS100



Provides support from beam for multiple runs of 14-3 to 10-2 MC/AC cable up to 8 runs

Clip rotates 360°

Static load limit: 75 lbs

Fits Flange	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/8 - 1/4	BC18MCS100	MCS10024	BRC52U24	25
5/16 - 1/2	BC516MCS100	MCS10058	BRC52U58	25
3/8 - 3/4	BC916MCS100	MCS100912	BRC52U912	25

CONDUIT/CABLE

FLANGE MOUNT CONDUIT CLIP ASSEMBLY

SFC1875



Suspends conduit from side of beam
Clip rotates 360°

Static Load Limit: 15 lbs

Fits Flange	Fits Conduit		Cross Reference			Std Pkg
	Fits EMT	Fits Rigid	Minerallac PN	Caddy PN	B-Line PN	
1/8-1/4	1/2	-	SFC1850	8P24SM	BP8E24	100
1/8-1/4	3/4	1/2	SFC1875	12P24SM	BP12E24	100
1/8-1/4	1	3/4	SFC18100	16P24SM	BP16E24	100
5/16-1/2	1/2	-	SFC51650	8P58SM	BP8E58	100
5/16-1/2	3/4	1/2	SFC51675	12P58SM	BP12E58	100
5/16-1/2	1	3/4	SFC516100	16P58SM	BP16E58	100
9/16-3/4	1/2	-	SFC91650	8P912SM	BP8E912	100
9/16-3/4	3/4	1/2	SFC91675	12P912SM	BP12E912	100
9/16-3/4	1	3/4	SFC916100	16P912SM	BP16E912	100

CONDUIT/CABLE

FLANGE MOUNT CONDUIT CLIP ASSEMBLY

SFC516KC1



Suspends conduit from side of beam

Clip rotates 360°

Installs with hammer only

Static Load Limit: 25 lbs

Fits Flange	Fits Conduit	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/8-1/4	3/8	SFC18KC38	6M24SM	BG6E24	100
1/8-1/4	1/2, 3/4	SFC18KC1234	812M24SM	BG812E24	100
1/8-1/4	1	SFC18KC1	16M24SM	BG16E24	100
1/8-1/4	1 1/4	SFC18KC114	20M24SM	BG20E24	100
1/8-1/4	1 1/2	SFC18KC112	24M24SM	BG24E24	100
1/8-1/4	2	SFC18KC2	32M24SM	BG32E24	100
5/16-1/2	3/8	SFC516KC38	6M58SM	BG6E58	100
5/16-1/2	1/2, 3/4	SFC516KC1234	812M58SM	BG812E58	100
5/16-1/2	1	SFC516KC1	16M58SM	BG16E58	100
5/16-1/2	1 1/4	SFC516KC114	20M58SM	BG20E58	100
5/16-1/2	1 1/2	SFC516KC112	24M58SM	BG24E58	100
5/16-1/2	2	SFC516KC2	32M58SM	BG32E58	100
9/16-3/4	3/8	SFC916KC38	6M912SM	BG6E912	100
9/16-3/4	1/2, 3/4	SFC916KC1234	812M912SM	BG812E912	100
9/16-3/4	1	SFC916KC1	16M912SM	BG16E912	100
9/16-3/4	1 1/4	SFC916KC114	20M912SM	BG20E912	100
9/16-3/4	1 1/2	SFC916KC112	24M912SM	BG24E912	100
9/16-3/4	2	SFC916KC2	32M912SM	BG32E912	100

CONDUIT/CABLE

FLANGE MOUNT FLEX CONDUIT CLIP ASSEMBLY

NEW! SFC18MC2



Suspends double run of 14-2 to 10-3 MC/AC cable from side of beam

Clip rotates 360°

Installs with hammer

Fits Flange	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/8 - 1/4	SFC18MC2	MAC224SM	BX4ME24	100
5/16 - 1/2	SFC516MC2	MAC258SM	BX4ME58	100
9/16 - 3/4	SFC916MC2	MAC2912SM	BX4ME912	100

CONDUIT/CABLE

CONDUIT & BOX SUPPORT FASTENERS

CBS18KC1234



CBS18KC1234ST



Provides conduit support on both sides of electrical box with center hole for screw or with 1/4" - 20 x 5/8" stud

Made from pre-galvanized steel with BlackClaw™ spring steel conduit clips riveted to part

Mount 4" Square Boxes For Use With	Cross Reference			
	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
3/8 Conduit	CBS18KC38	6MB18A	BG6S18	25
1/2, 3/4 Conduit	CBS18KC1234	812MB18A	BG812S18	25
1 Conduit	CBS18KC1	16MB18A	BG16S18	25

Mount 4" Square Boxes With 1/4 - 20" Stud	Cross Reference			
	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
3/8 Conduit	CBS18KC38ST	-	BG6S18S	25
1/2, 3/4 Conduit	CBS18KC1234ST	812MB18S	BG812S18S	25
1 Conduit	CBS18KC1ST	-	BG16S18S	25

CONDUIT/CABLE

CONDUIT & BOX SUPPORT FASTENERS

CBS18HIC100



CBS18HIC100ST



Mount 4" Square Boxes For Use With	Cross Reference			
	Minerallac Part #	Caddy PN	B-Line PN	Std Pkg
½ EMT	CBS18HIC50	-	BP8S18	25
¾ EMT or ½ Rigid	CBS18HIC75	-	BP12S18	25
1 EMT or ¾ Rigid	CBS18HIC100	-	BP16S18	25

Mount 4" Square Boxes With 1/4 - 20" Stud	Cross Reference			
	Minerallac Part #	Caddy PN	B-Line PN	Std Pkg
½ EMT	CBS18HIC50ST	-	BP8S18S	25
¾ EMT or ½ Rigid	CBS18HIC75ST	-	BP12S18S	25
1 EMT or ¾ Rigid	CBS18HIC100ST	-	BP16S18S	25

CONDUIT SUPPORT WITH ANGLE BRACKET

CBS18KC1234SBD



Meets NEC section 300.4(E)

Provides 1½" clearing from decking

Fits Conduit	Cross Reference			
	Minerallac Part #	Caddy PN	B-Line PN	Std Pkg
¾	CBS18KC38SBD	6MB18CPNAM	BG6S18DH	25
½, ¾	CBS18KC1234SBD	812MB18CPNAM	BG812S18DH	25
1	CBS18KC1SBD	16MB18CPNAM	BG16S18DH	25

CONDUIT/CABLE

CONDUIT SUPPORT ASSEMBLY

CBS18KC1234APS



CBS18HIC100APS



Provides conduit support on both sides of electrical box with multi-purpose clip

Fits #12 thru #8 wire

Fits 1/8" to 3/8" flange

Fits 1/4" to 3/8" rod

Clip rotates 360°

Made from pre-galvanized steel with Black Claw™ spring steel fasteners riveted to part

For Use With	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
3/8 Conduit	CBS18KC38APS	6MB18, 6MB186	BG6S18W2, BG6S18W6	25
1/2, 3/4 Conduit	CBS18KC1234APS	812MB18, 812MB186	BG812S18W2, BG812S18W6	25
1 Conduit	CBS18KC1APS	16MB18, 16MB186	BG16S18W2, BG16S18W6	25

For Use With	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/2 EMT	CBS18HIC50APS	-	BP8S18W2, BP8S18W6	25
3/4 EMT or 1/2 Rigid	CBS18HIC75APS	-	BP12S18W2, BP12S18W6	25
1 EMT or 3/4 Rigid	CBS18HIC100APS	-	BP16S18W2, BP16S18W6	25

CONDUIT/CABLE

BEAM MOUNT CONDUIT & BOX SUPPORT ASSEMBLY

CBS18KC123418



CBS18HIC10018



Provides conduit support on both sides of electrical box

Attaches to beam flanges from 1/8" to 1/2" thick

Made from pre-galvanized steel with Black Claw™ spring steel fasteners riveted to part

Mount 4" Square Boxes		Cross Reference			
Conduit Size	Flange Thickness	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
3/8	1/8-1/4	CBS18KC3818	6MB1824	BG6S18U24	25
3/8	5/16-1/2	CBS18KC38516	6MB1858	BG6S18U58	25
1/2-3/4	1/8-1/4	CBS18KC123418	812MB1824	BG12S18U24	25
1/2-3/4	5/16-1/2	CBS18KC1234516	812MB1858	BG812S18U58	25
1	1/8-1/4	CBS18KC118	16MB1824	BG16S18U24	25
1	5/16-1/2	CBS18KC1516	16MB1858	BG16S18U58	25
1/2 EMT	1/8-1/4	CBS18HIC5018	-	BP8S18U24	25
1/2 EMT	5/16-1/2	CBS18HIC50516	-	BP8S18U58	25
1/2-3/4 or 1/2 Rigid	1/8-1/4	CBS18HIC7518	-	BP12S18U24	25
1/2-3/4 or 1/2 Rigid	5/16-1/2	CBS18HIC75516	-	BP12S18U58	25
1 EMT or 3/4 Rigid	1/8-1/4	CBS18HIC10018	-	BP16S18U24	25
1 EMT or 3/4 Rigid	5/16-1/2	CBS18HIC100516	-	BP16S18U58	25

HANGING HARDWARE



HANGING HARDWARE

WIRE MC/AC CABLE HANGER

NEW! WB6



Galvanized wire hanger bundles runs of MC or AC cable

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1-1/8 Dia.	WBX3	WMX3	BX2	100
1-3/9 Dia.	WBX6	WMX6	BX6	100

ROD/WIRE BRACKET SUPPORT

RA14



RA14T



Suspends #8 wire, 1/4" and 3/8" plain or threaded rod from overhead with 1/4" mounting hole

Hangers made from high-carbon steel, zinc phosphate and oil finish. Angle bracket made from pre-galvanized steel

Static Load Limit: 160 lbs

***Nut required**

Angle Bracket Rod Hangers For Use With	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
#8 Wire or 1/4" Plain Rod	RA14	708AB	BH1H7	100
3/8" Plain Rod	RA38	6AB	BH2H7	100
1/4" - 20 Threaded Rod	RA14T	4TIB	BH4H7	100
3/8" - 16 Threaded Rod	RA38T	6TIB	BH6H7	100
1/4" to 3/8" Threaded Rod	RA1438N*	6TB	BH5H7	100

HANGING HARDWARE

ROD/WIRE BEAM ASSEMBLIES

R1814



Suspends #8 wire, 1/4" and 3/8" plain rod from beams 1/8" to 3/4" thick

Static Load Limit: 160 lbs

Flange Thickness	For Use With	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/8-1/4	#8 Wire or 1/4" Plain Rod	R1814	70824	BH1E24	100
5/16-1/2	#8 Wire or 1/4" Plain Rod	R51614	70858	BH1E58	100
9/16-3/4	#8 Wire or 1/4" Plain Rod	R91614	708912	BH1E912	100
1/8-1/4	3/8" Plain Rod	R1838	6A24	BH2E24	100
5/16-1/2	3/8" Plain Rod	R51638	6A58	BH2E58	100
9/16-3/4	3/8" Plain Rod	R91638	6A912	BH2E912	100

R1814T



Suspends 1/4" and 3/8" threaded rod from beams 1/8" to 3/4" thick

Static Load Limit: 160 lbs

Flange Thickness	For Use With	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/8-1/4	1/4" - 20 ATR	R1814T	4TI24	BH4E24	100
5/16-1/2	1/4" - 20 ATR	R51614T	4TI58	BH4E58	100
9/16-3/4	1/4" - 20 ATR	R91614T	4TI912	BH4E912	100
1/8-1/4	3/8" - 16 ATR	R1838T	6TI24	BH6E24	100
5/16-1/2	3/8" - 16 ATR	R51638T	6TI58	BH6E58	100
9/16-3/4	3/8" - 16 ATR	R91638T	6TI912	BH6E912	100

HANGING HARDWARE

STRAP HANGERS

NEW! PSF332



NEW! PSF332R



Suspends strapping thru 1" wide from beam flanges $\frac{3}{32}$ " to $\frac{3}{4}$ " thick, parallel or at right angles to beam

Static Load Limit: 200 lbs
 +PSF332 & PSF332R static load limit 160 lbs

Cross Reference

Flange Thickness	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
$\frac{3}{32}$ - $\frac{9}{64}$	PSF332⁺	-	BHE12	100
$\frac{1}{8}$ - $\frac{1}{4}$	PSF18	MSS24	BH24	100
$\frac{5}{16}$ - $\frac{1}{2}$	PSF516	MSS58	BH58	100
$\frac{9}{16}$ - $\frac{3}{4}$	PSF916	MSS912	BH912	100

Cross Reference

Right Angle Strap Fits Flange Thickness	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
$\frac{3}{32}$ - $\frac{9}{64}$	PSF332R⁺	-	BH12R	100
$\frac{1}{8}$ - $\frac{1}{4}$	PSF18R	MSR24	BH24R	100
$\frac{5}{16}$ - $\frac{1}{2}$	PSF516R	MSR58	BH58R	100
$\frac{9}{16}$ - $\frac{3}{4}$	PSF916R	MSR912	BH912R	100

ROD HANGERS

R38T



Used for hanging rod
 Static Load Limit: 160 lbs

***Nut required**

Cross Reference

For Use With	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
$\frac{1}{4}$ " or $\frac{3}{8}$ " Threaded Rod	R1438N⁺	6T	BH5	100
$\frac{1}{4}$ " - 20 Threaded Rod	R14T	4TI	BH4	100
$\frac{3}{8}$ " - 16 Threaded Rod	R38T	6TI	BH6	100



**VOICE/DATA &
LOW VOLTAGE**

VOICE/DATA & LOW VOLTAGE

CABLE SUPPORT J-HOOKS

NEW! J75



J200+



Cost effective alternative to expensive cable tray

Accommodates category 5 and 6, fiber-optic and interduct

Provides support without stress to sensitive voice/data cables

Cable retainer is supplied with every part

***J200 Series contains a plastic retaining pin**

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
3/4	Steel Pin	J75	CAT12	BCH12	50
1 5/16	Steel Pin	J131	CAT21HP,CAT21	BCH21	50
2	Plastic Clip	J200+	CAT32HP, CAT32	BCH32	50
4	Steel Pin	J400	CAT64HP,CAT64	BCH64	25

J-HOOK ANGLE BRACKET ASSEMBLY

NEW! J75B



Angle bracket has 1/4" mounting hole

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
3/4	Steel Pin	J75B	CAT12AB	BCH12RB	50
1 5/16	Steel Pin	J131B	CAT21AB, CAT21HPAB	BCH21RB	50
2	Plastic Clip	J200B+	CAT32AB, CAT32HPAB	BCH32RB	50
4	Steel Pin	J400B	CA64AB, CA64HPAB	BCH64RB	25

VOICE/DATA & LOW VOLTAGE

J-HOOK SET SCREW BEAM CLAMP ASSEMBLIES

NEW! J131600



Universal sets screw beam clamp fits up to ½” flange

***J200 Series contains a plastic retaining pin**

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
¾	Steel Pin	J75600	CAT12BC200	BCH12C442A	50
1 5/16	Steel Pin	J131600	CAT21BC200, CAT21HPBC200	BCH21C442A	50
2	Plastic Clip	J200600*	CAT32BC200, CAT32HPBC200	BCH32C442A	50
4	Steel Pin	J400600	CAT64BC200, CAT64HPBC200	BCH64C442A	25

NEW! J75500



Set screw beam clamp fits up to ½” flange

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
¾	Steel Pin	J75500	CAT12BC	BCH12C1	50
1 5/16	Steel Pin	J131500	CAT21BC, CAT21HPBC	BCH21C1	50
2	Plastic Clip	J200500*	CAT32BC, CAT32HPBC	BCH32C1	50
4	Steel Pin	J400500	CAT64BC, CAT64HPBC	BCH64C1	25

VOICE/DATA & LOW VOLTAGE

J-HOOK SET SCREW BEAM CLAMP ASSEMBLIES

NEW! J75B500



Set screw beam clamp fits up to 1/2" flange

Beam clamp rotates 360°

***J200 Series contains a plastic retaining pin**

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
3/4	Steel Pin	J75B500	CAT12BCB	BCH12C2	50
1 5/16	Steel Pin	J131B500	CAT21BCB, CAT21HPBCB	BCH21C2	50
2	Plastic Clip	J200B500*	CAT32BCB, CAT32HPBCB	BCH32C2	50
4	Steel Pin	J400B500	CAT64BCB, CAT64HPBCB	BCH64C2	25

NEW! J75B600



Universal set screw beam clamp fits up to 1/2" flange

Beam clamp rotates 360°

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
3/4	Steel Pin	J75B600	CAT12BC200B	BCH12C442	50
1 5/16	Steel Pin	J131B600	CAT21BC200B, CAT21HPBC200B	BCH21C442	50
2	Plastic Clip	J200B600*	CAT32BC200B, CAT32HPBC200B	BCH32C442	50
4	Steel Pin	J400B600	CAT64BC200B, CAT64HPBC200B	BCH64C442	25

VOICE/DATA & LOW VOLTAGE

J-HOOK MULTI-PURPOSE CLIP ASSEMBLY

NEW! J75APS



Multi-purpose clip APS

Fits #12 thru #8 wire

Fits 1/8" to 3/8" flange

Fits 1/4" to 3/8" rod

***J200 Series contains a plastic retaining pin**

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
3/4	Steel Pin	J75APS	CAT124Z34, CAT126Z34	BCH12W2, BCH12W6	50
1 5/16	Steel Pin	J131APS	CAT214Z34, CAT21HP4Z34, CAT216Z34, CAT21HP6Z34	BCH21W2, BCH21W6	50
2	Plastic Clip	J200APS*	CAT324Z34, CAT32HP4Z34, CAT326Z34, CAT32HP6Z34	BCH32W2, BCH32W6	50

J-HOOK Z-PURLIN HANGER ASSEMBLY

NEW! J131ABC



Angled beam clamp fits 1/16" to 1/4" z-purlin

Hammer or pull onto purlin

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
3/4	Steel Pin	J75ABC	CAT12AF14	BCH12F4	50
1 5/16	Steel Pin	J131ABC	CAT21AF14, CAT21HPAF14	BCH21F4	50
2	Plastic Clip	J200ABC25*	CAT32AF14, CAT32HPAF14	BCH32F4	50
4	Steel Pin	J400ABC	CAT64AF14, CAT64HPAF14	BCH64F4	25

VOICE/DATA & LOW VOLTAGE

J-HOOK VERTICAL FLANGE ASSEMBLY

NEW! J75VBC



Vertical beam clamp fits 1/16" to 1/4" flange
Hammer or pull onto flange

***J200 Series contains a plastic retaining pin**

J-Hook Size (in.)	Retainer	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
3/4	Steel Pin	J75VBC	CAT12VF14	BCH12F3	50
1 5/16	Steel Pin	J131VBC	CAT21VF14, CAT21HPVF14	BCH21F3	50
2	Plastic Clip	J200VBC25*	CAT32VF14, CAT32HPVF14	BCH32F3	50
4	Steel Pin	J400VBC	CAT64VF14, CAT64HPVF14	BCH64F3	25

VOICE/DATA & LOW VOLTAGE

J-HOOK FLANGE CLAMP ASSEMBLY

NEW! J75SFC18



SFC18 fits 1/8" to 1/4" flange
 SFC516 fits 5/16" to 1/2" flange
 SFC916 fits 9/16" to 3/4" flange
 Hammer onto flange

***J200 Series contains a plastic retaining pin**

		Cross Reference			
J-Hook Size (in.)	Retainer	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
3/4	Steel Pin	J75SFC18	CAT1224SM,	BCH12E24	50
3/4	Steel Pin	J75SFC516	CAT1258SM	BCH12E58	50
3/4	Steel Pin	J75SFC916	CAT12912SM	BCH12E912	50
1 5/16	Steel Pin	J131SFC18	CAT2124SM / CAT21HP24SM	BCH21E24	50
1 5/16	Steel Pin	J131SFC516	CAT2158SM / CAT21HP58SM	BCH21E58	50
1 5/16	Steel Pin	J131SFC916	CAT21912SM / CAT21HP912SM	BCH21E912	50
2	Plastic Clip	J200SFC18*	CAT3224SM / CAT32HP24SM	BCH32E24	50
2	Plastic Clip	J200SFC516*	CAT3258SM / CAT32HP58SM	BCH32E58	50
2	Plastic Clip	J200SFC916*	CAT32912SM / CAT32HP912SM	BCH32E912	50
4	Steel Pin	J400SFC18	CAT6424SM / CAT64HP24SM	BCH64E24	25
4	Steel Pin	J400SFC516	CAT6458SM / CAT64HP58SM	BCH64E58	25
4	Steel Pin	J400SFC916	CAT64912SM / CAT64HP912SM	BCH64E912	25

VOICE/DATA & LOW VOLTAGE

J-HOOK BEAM CLAMP ASSEMBLY

J200BBC516



BC18 fits 1/8" to 1/4" flange
 BC516 fits 5/16" to 1/2" flange
 BC916 fits 9/16" to 3/4" flange
 Hammer-on beam clamps rotate 360°


*J200 Series contains a plastic retaining pin

		Cross Reference				
J-Hook Size (in.)	Retainer	Minerallac PN	Caddy PN	B-Line PN	Std Pkg	
3/4	Steel Pin	J75BBC18	CAT1224	BCH12U24	50	
3/4	Steel Pin	J75BBC516	CAT1258	BCH12U58	50	
3/4	Steel Pin	J75BBC916	CAT12912	BCH12U912	50	
1 5/16	Steel Pin	J131BBC18	CAT2124 / CAT21HP24	BCH21U24	50	
1 5/16	Steel Pin	J131BBC516	CAT2158 / CAT21HP58	BCH21U58	50	
1 5/16	Steel Pin	J131BBC916	CAT21912 / CAT21HP912	BCH21U912	50	
2	Plastic Clip	J200BBC18*	CAT3224 / CAT32HP24	BCH32U24	50	
2	Plastic Clip	J200BBC516*	CAT3258 / CAT32HP58	BCH32U58	50	
2	Plastic Clip	J200BBC916*	CAT32912 / CAT32HP912	BCH32U912	50	
4	Steel Pin	J400BBC18	CAT6424 / CAT64HP24	BCH64U24	25	
4	Steel Pin	J400BBC516	CAT6458 / CAT64HP58	BCH64U58	25	
4	Steel Pin	J400BBC916	CAT64912 / CAT64HP912	BCH64U912	25	

VOICE/DATA & LOW VOLTAGE

MOUNTING BRACKETS

NEW! WBF2




NEW! WBF2P



NEW! WB1



NEW! WB2S



NEW! WB1



NEW! WB2



WBF1



NEW! WBF1P



NEW! WB1S



Provides base for securing class 2 wiring lines without use of electrical box
Mounts standard plate

***Includes screws**

Cross Reference

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1 Gang; Mounting Holes 2; PG	WB1*	MP1	BB10	100
2 Gang; Mounting Holes 0; PG	WB2	MP2	BB20	100
1 Gang; Mounting Holes 2; PG	WBF1*	MPLS	BB10L	100
2 Gang; Mounting Holes 3; PG	WBF2*	MPLS2	BB20L	100
2 Gang; Mounting Holes 2; Plastic	WBF1P	MP1P	BB10P	100
2 Gang Mounting Holes 4; Plastic	WBF2P	MPAL2	-	100
1 Gang; New Construction; PG	WB1S	MP1S	BB15	25
2 Gang; New Construction; PG	WB2S	MP2S	BB25	25

VOICE/DATA & LOW VOLTAGE

BRIDLE RINGS

648R



Supports communications cable and other low voltage wire. Can be used with Minerallac Beam Clamps

Zinc plated steel

*Stainless steel

Ring Size Diameter (in.)	Thread	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1	10-24	634R	2BRT20	BR20T	100
1½	¼"-20	646R	4BRT20	BR204T	100
2	¼"-20	648R	4BRT32	BR324T	100
2	¼"-20	648RSS*	-	-	100
4	¼"-20	654R	4BRT64	BR644T	50

648RW



Supports communications cable and other low voltage wire from wood beams

Zinc plated steel

Ring Size Diameter (in.)	Thread	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1	⅜	634RW	-	BR163W	100
1½	¼	646RW	4BRT20WS	BR244W	100
2	¼	648RW	4BRT32WS	BR324W	100

VOICE/DATA & LOW VOLTAGE

BRIDLE RINGS WITH SADDLE

648RS



648RWS



Cost effective alternative to cable tray

Wide surface saddle provides support without stress for Category 5 and 6, fiber-optic and other sensitive voice/datacom cables

Available as assembled units or saddle only for retrofit

Saddle molded onto 4" bridle ring

Saddle Assembly Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/4" - 20" Mechanical Thread				
1 1/2" Bridle Ring with Saddle	646RS	-	-	50
2" Bridle Ring with Saddle	648RS	-	BRS32A	50
4" Bridle Ring with Saddle	654RS	-	BRS64A	50
Lag Thread				
1 1/2" Bridle Ring with Saddle	646RWS	-	-	50
2" Bridle Ring with Saddle	648RWS	-	-	50

BRS2



Saddle snaps into bridle ring

Saddle Only Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1 1/2" Bridle Ring	BRS15	-	-	100
2" Bridle Ring	BRS2	-	BRS32	100

VOICE/DATA & LOW VOLTAGE

D-RINGS

DR40



Used to support multiple cable runs
Smooth non-conductive surface won't damage cable

Lower cost than steel distribution rings (D-rings)

Parts made from high-strength, UV stabilized non-metallic composite

Ring Size (H x W) Inside Opening	Cross Reference			Std Pkg
	Minerallac PN	Arlington PN	B-Line PN	
2¼ x 2	DR20	D22	-	50
3¼ x 3	DR30	D33	-	25
3¼ x 5	DR40	D35	-	10

A black and white photograph showing a close-up of a metal beam or purlin connection. A dark metal bracket is mounted on a horizontal beam. Two large, threaded bolts are visible, extending downwards from the bracket. The background is blurred, showing a grid-like structure, possibly a roof or ceiling. A diagonal black line separates the top-left corner of the image from the rest of the frame.

BEAM/PURLIN

BEAM/PURLIN

BEAM CLAMPS

BC18



BC916ST



Suspend boxes, fixtures and bridle rings to beam flanges 1/8" to 3/4" thick

Beam Clamp with 1/4"-20 x 5/8" staked stud suspends box and other items from bottom of beam

Static Load Limit: 75 lbs or 100 lbs

NOTE: Static load limits cannot be combined

Flange Thickness	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Bottom & Back Tapped 1/4"-20				
1/8"-1/4"	BC18	M24	BU24	100
5/16"-1/2"	BC516	M58	BU58	100
9/16"-3/4"	BC916	M912	BU912	100
With 1/4"-20 x 5/8" Stud				
1/8"-1/4"	BC18ST	M24S	BU24S	100
5/16"-1/2"	BC516ST	M58S	BU58S	100
9/16"-3/4"	BC916ST	M912S	BU912S	100

500



Fast installation; fits beam flange to 1/2"

Used with 1/4" or 3/8" threaded rod, "S" hooks, conduit hangers, electrical boxes, and #10-24 or 1/4"-20 bridle rings

Tapping 1/4"-20 bottom and back. Also #10-24 tapping on back

Static Load Limit: 100 lbs

Accommodates		Cross Reference			Std Pkg
Flange	Drop Rod (in.)	Minerallac PN	Caddy PN	B-Line PN	
Up to 1/2" Thick	1/4 or 3/8	500	BC	BC1	100

BEAM/PURLIN

SIDE MOUNT FLANGE CLAMP

NEW! SFC332



SFC516



Installed with hammer on
bulb tees and beams

1/4" mounting hole

Static Load Limit: 200 lbs

***SFC332 static load limit 160 lbs**


Flange Thickness	Cross Reference				Std Pkg
	Minerallac PN	Caddy PN	B-Line PN		
3/32-9/64	SFC332+	2H4	BE12		100
1/8-1/4	SFC18	4H24	BE24		100
5/16-1/2	SFC516	4H58	BE58		100
9/16-3/4	SFC916	4H912	BE912		100

BEAM CLAMP TO CONDUIT/CABLE HANGER ASSEMBLIES

50050



50050B



Suspends conduit from beams up to
1/2" thick with snap-in conduit hangers

Ultimate Static Load Limit:

25 lbs Vertical Position

15 lbs Horizontal Position

Fits EMT	Fits Rigid/IMC	Cross Reference				Std Pkg
		Minerallac PN	Caddy PN	B-Line PN		
1/2	-	50050	BC8P	BP8C2		100
3/4	1/2	50075	BC12P	BP12C2		100
1	3/4	500100	BC16P	BP16C2		100
1/2	-	50050B	BC8PSM	BP8C1		100
3/4	1/2	50075B	BC12PSM	BP12C1		100
1	3/4	500100B	BC16PSM	BP16C1		100

BEAM/PURLIN

BEAM CLAMP CONDUIT/CABLE HANGER ASSEMBLIES

500KC1234



500KC1234B



Suspends conduit from beams up to ½" thick with closed clip conduit hangers

Static Load Limit:

100 lbs Vertical Position

25 lbs Horizontal Position

Fits Conduit	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
½, ¾	500KC1234	BC812M	BG812C2	100
1	500KC1	BC16M	BG16C2	100
1¼	500KC114	BC20M	BG20C2	100
1½	500KC112	BC24M	BG24C2	100
2	500KC2	BC32M	BG32C2	100
½, ¾	500KC1234B	BC812MSM	BG812C1	100
1	500KC1B	BC16MSM	BG16C1	100
1¼	500KC114B	BC20MSM	BG20C1	100
1½	500KC112B	BC24MSM	BG24C1	100
2	500KC2B	BC32MSM	BG32C1	100

BEAM CLAMP FLEX CONDUIT ASSEMBLIES

NEW! 500MC2



NEW! 600BMCS101



Suspends runs of MC/AC cable fits up to ½" thick flange

Fits Cable	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1 run 14-2 to 10-3 MC/AC	500MC1	-	BX4C2	100
2 run 14-2 to 10-3 MC/AC	500MC2	MAC2BC	BX4MC2	100
10-3 to 8-3 MC/AC; up to 7	600BMCS101	MCS101BC200	BRC53C442	25

BEAM/PURLIN

Z PURLIN / VERTICAL FLANGE HANGER

ABC25



VBC25



Fits 1/16" to 1/4" thick Z Purlin (ABC25) or vertical flanges (VBC25)

Clearance for 1/4" bolt

Accommodates tooling for floor installations

Static Load Limit: ABC25 = 100 lbs

VBC25 = 160 lbs

Flange Thickness	For Use With	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/16"-1/4"	Angled Z Purlin for S-Hooks, Perforated Strap and Wire	ABC25	AF14	BF4	100
1/16"-1/4"	Vertical Flange for S-Hooks, Perforated Strap and Wire	VBC25	VF14	BF3	100

FH116



Clearance for 1/4" bolt

Static Load Limit: 160 lbs

Flange Thickness	For Use With	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/16"-5/16"	S-Hooks, Perforated Strap and Wire	FH116	-	BF1	100
5/32"-1/4"	S-Hooks, Perforated Strap and Wire	FH532	-	BF2	100

BEAM/PURLIN

Z PURLIN / VERTICAL FLANGE HANGER

P



PH



Installs with hammer

Compensates for angle of purlin

Static Load Limit: 100 lbs

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/4" Bottom Hole	P	123	BF13	100
1/4" Hole for Wire, S-Hooks, Perforated Strap and Jack Chain	PH	122	BF12	100

Z PURLIN STRAP ASSEMBLIES

NEW! PHPS



NEW! PHPSR



NEW! ABC25PSR



NEW! ABC25PS



Installs with hammer

Suspends strap from z-purlin

Fits up to 1" strap

Static Load Limit: 100 lbs

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Parallel	PHPSR	-	BHF12	100
Right Angle	PHPS	-	BHF12R	100
Right Angle	ABC25PS	-	-	100
Parallel	ABC25PSR	-	-	100

BEAM/PURLIN

Z PURLIN CONDUIT ASSEMBLIES

PKC38



Installs with hammer

Compensates for angle of purlin

Suspends conduit from z-purlin with closed clip conduit hanger

Static Load Limit: 100 lbs

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
3/8 Conduit to Z Purlin	PKC38	1236M	BG6F13	100
1/2 or 3/8 Conduit to Z Purlin	PKC1234	123812M	BG812F13	100
1 Conduit to Z Purlin	PKC1	12316M	BG16F13	100
1 1/4" Conduit to Z Purlin	PKC114	12320M	BG20F13	100

P50



Installs with hammer

Compensates for angle of purlin

Suspends conduit with snap-in conduit hanger

Static Load Limit: 25 lbs

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/2 EMT	P50	1238P	BP8F13	100
1/2 EMT or 3/4 Rigid	P75	12312P	BP12F13	100
1 EMT or 3/4 Rigid	P100	12316P	BP16F13	100

BEAM/PURLIN

Z PURLIN ROD ASSEMBLIES

PH14T



Installs with hammer
Compensates for angle of purlin
Suspends threaded rod
Static Load Limit: 100 lbs
***Nut Required**

For Use With	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/4" - 20 ATR	PH14T	1224TI	BH4F12	100
3/8" - 16 ATR	PH38T	1226TI	BH6F12	100
1/4" or 3/8" ATR	PH1438N*	1226T	BH5F12	100

ABC25R38T



Installs with hammer
Compensates for angle of purlin
Suspends threaded rod
Static Load Limit: 100 lbs
***Nut Required**

For Use With	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/4" - 20 ATR	ABC25R14T	AF144TI	BH4F4	100
1/4" or 3/8" ATR	ABC25R1438N*	AF146T	BH5F4	100
3/8" - 16 ATR	ABC25R38T	AF146TI	BH6F4	100

PCSW25



Fits C or Z purlin up to 1/4"
Rod hanger swivels
Static Load Limit: 160 lbs

For Use With	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/4" - 20 ATR	PCSW25	PHSW4	-	25
3/8" - 16 ATR	PCSW37	PHSW6	-	25

BEAM/PURLIN

VERT FLANGE ROD ASSEMBLIES

VBC25R1438N



Suspends rod from 1/16" to 1/4" vertical flange

Static Load Limit: 160 lbs

*Nut Required

For use with	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
1/4" - 20 Threaded Rod	VBC25R14T	VF144TI	BH4F3	100
1/4" or 3/8" Threaded Rod	VBC25R1438N*	VF146T	BH5F3	100
3/8" - 16 Threaded Rod	VBC25R38T	VF146TI	BH6F3	100

RF11638T



Suspends 1/4" or 3/8" threaded rod from vertical flange 1/16" to 1/4" thick

Static Load Capacity: 160 lbs

Flange Thickness	For Use With	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/16" - 5/32"	1/4" - 20 ATR	RF11614T	-	BH4F1	100
5/32" - 1/4"	1/4" - 20 ATR	RF53214T	-	BH4F2	100
1/16" - 5/32"	3/8" - 16 ATR	RF11638T	-	BH6F1	100
5/32" - 1/4"	3/8" - 16 ATR	RF53238T	-	BH6F2	100

BEAM/PURLIN

VERT FLANGE FLEX CABLE ASSEMBLIES


NEW! VBCMC2



Suspends MC/AC cable from 1/16" to 1/4" vertical flange

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
DBL Run of 14-3 to 10-3 MC/AC Cable	VBCMC2	MAC2VF14	BX4MF3	100

STUD & DRYWALL

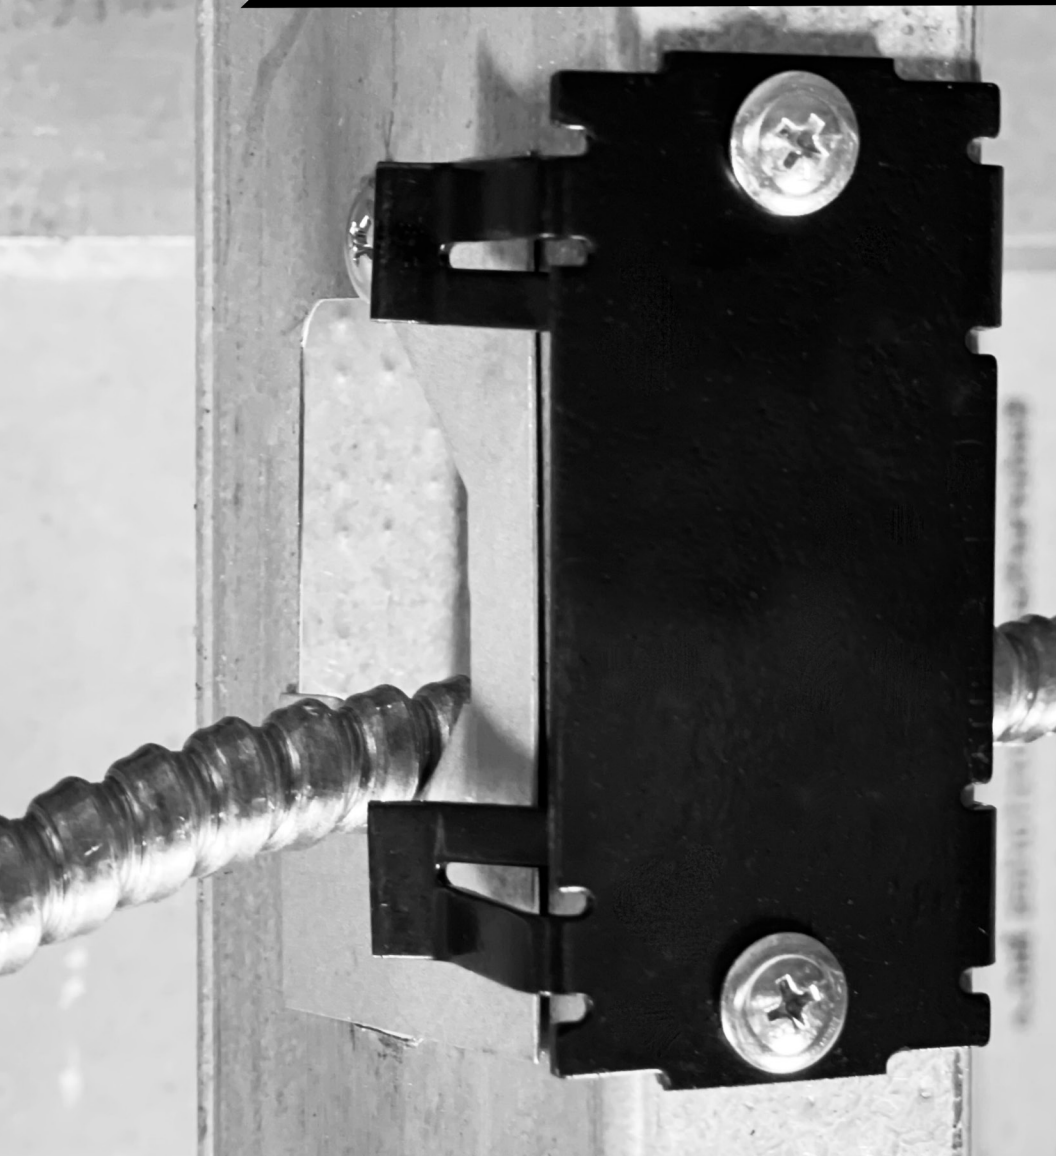

METAL STUD & DRYWALL

CABLE PROTECTION

NEW! NPMS



Nail plate snaps onto metal stud
 For wood or metal studs
 Two mounting holes for screw or nail

Description	Cross Reference			Std Pkg
	Minerallac Part #	Caddy PN	B-Line PN	
3 x 1½"	NPMS	304B2	BM3M	100

THROUGH STUD CONDUIT/CABLE SUPPORTS

NEW! ARS



BAKC1234



ARS anti-rattle support permits pull through metal stud
 BA series provides conduit and cable support through metal stud

Fits Conduit	Cross Reference			Std Pkg
	Minerallac Part #	Caddy PN	B-Line PN	
EMT or MC/AC	ARS	781	BX82	100
¾ or BX	BAKC38	FB6M	BG6H7	100
½ or ¾	BAKC1234	FB812M	BG812H7	100
½ EMT	BA50	FB8P	BP8H7	100
¾ EMT or ½ Rigid	BA75	FB12P	BP12H7	100

METAL STUD & DRYWALL

FLEXIBLE CONDUIT/CABLE FASTENER

BXC



Push clip attaches BX, MC or AC cable with O.D. 0.42 to 0.70" to metal studs

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
MC, AC or BX to Metal Stud	BXC	449	BX9	100

SBX



Secures conduit to most metal studs
Installed using a hammer only

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
MC or BX (12-2 thru 10-3) to Metal Studs	SBX	FXC20	BX5	100

CONDUIT TO STUD SUPPORT

SS75



SSK1234



Screw attached support for vertical runs of Rigid, EMT, or PVC to metal studs

Fits EMT	Fits Rigid/IMC	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
1/2	-	SS50	3508P	BP8B1	100
3/4	1/2	SS75	35012P	BP12B1	100
1	3/4	SS100	35016P	BP16B1	100

Fits Conduit	Cross Reference			Std Pkg
	Minerallac Part #	Caddy PN	B-Line PN	
1/2 or 3/4	SSK1234	350812M	BG812B1	100
1	SSK1	35016M	BG16B1	100

METAL STUD & DRYWALL

BOX TO STUD FASTENER

SS



Screw attached support for electrical box. For use with either metal or wood studs

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Electrical Box Support Clip Secured with Self-Tapping Screws for Wood or Metal Studs	SS	350	BB1	100

BOX TO STUD SUPPORT

S1900



Secures boxes to most metal studs
Installed using a hammer only

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Hammer Installed Electrical Box Support	S1900	MSF	BB9	100

SBC



Secures boxes to most metal studs
Installed using a hammer only

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Adjustable for 1/4" through 3/4" Drywall	SBC	MFS	BB6A	100

METAL STUD & DRYWALL

CONDUIT TO STUD FASTENER

SB50

SBKC1234



Designed to quickly secure vertical runs of Rigid, EMT, BX or PVC to metal studs

		Cross Reference			
Fits EMT	Fits Rigid/IMC	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
1/2	-	SB50	8PF	BP8B5	100
3/4	1/2	SB75	12PF	BP12B5	100
1	3/4	SB100	16PF	BP16B5	100

		Cross Reference			
Fits Conduit		Minerallac PN	Caddy PN	B-Line PN	Std Pkg
3/8 or BX		SBKC38	6MF	BG6B5	100
1/2 or 3/4		SBKC1234	812MF	BG812B5	100
1		SBKC1	16MF	BG16B5	100

FAR SIDE BOX SUPPORT

SBS

SBS3.5



Clips on electrical boxes for additional support

		Cross Reference			
Metal Stud Size		Minerallac PN	Caddy PN	B-Line PN	Std Pkg
2 1/2" thru 4", Sized by Bending at Pre-marked Lines		SBS	766	BB7	100
3 1/2"		SBS3.5	J1A35	BF156	100
6"		SBS6	-	BF196	100

METAL STUD & DRYWALL

PLASTIC FAR SIDE BOX SUPPORT

DLS1



No tools required. Just push in and mounts quickly in the back of the box

Designed for 3 5/8" steel studs

May be used on standard 1 1/2" or 2 1/8" deep boxes

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Designed for use with 3 5/8" steel studs	DLS1	766PM, 766PMD	-	100

UNIVERSAL PLASTIC METAL STUD GROMMET

G100



Protects wires from damage by metal studs
Easy to install—no tools required
Complies with 2011 NEC Article 300.4B/(1)

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Grommets for Metal Studs	G100	ESG1	BM2	100

PLASTIC OPEN SIDE METAL STUD BOX SUPPORT

NEW!BB4SFB



Plastic support provides a platform for installation of an electrical box on the open side of a metal stud

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Box mounts to BB4SFB with 3 to 4 #8 sheet metal screws. Attaches to both the open edge of metal stud with slot and one screw on retaining tab into stud	BB4SFB	-	-	25

METAL STUD & DRYWALL

BOX MOUNTING BRACKET

BMB16



Supports electrical boxes located between studs on 16" or 24" centers

Boxes attach using self-tapping screws

Made from pre-galvanized steel

Description	Cross Reference		
	Minerallac PN	Caddy PN	B-Line PN
1½" Box to Studs on 16" Centers	BMB16	SGB16A	BB216
2 1/8" Box to Studs on 16" Centers	BMB16D	SGB16A	BB216D
1½" Box to Studs on 24" Centers	BMB24	SGB24A	BB224
2 1/8" Box to Studs on 24" Centers	BMB24D	SGB24A	BB224D



NEW! BMBTSLDR



BMB1624T



Telescoping box support brackets

Slider bracket BMBTSLDR allows for box pre-assembly and slide into location for final assembly (designed for Minerallac BMB...T series only)

Description	Cross Reference		
	Minerallac PN	Caddy PN	B-Line PN
11 - 18" Mounting Bracket	BMB16T	TSGB16	BB216T
17 - 26" Box Mounting Bracket	BMB24T	TSGB24	BB224T
15 ½ - 25" Mounting Bracket	BMB1624T	TSGB1624	-
Pre-Assembly Slider	BMBTSLDR	TLSGDR1	BB2TSC

STUD & DRYWALL

BOX MOUNTING BRACKET

BMB244S4P



Fits 4 or 4 1¹/₁₆" square boxes
 16" has 3 boxes locations
 24" has 4 boxes locations

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
16" Multi Box Mounting Bracket	BMB164S3P	RBS16	BB816	25
24" Multi Box Mounting Bracket	BMB244S4P	RBS24	BB824	25

BMB16244SL



Telescoping 16" to 24" stud spacing
 Fits 4 1¹/₁₆" boxes
 Supports up to 4 boxes in 24" spacing
 Supports up to 6 gang box in 16" spacing and up to 10 gang in 24" spacing

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
16 - 24" Box Slider Mounting Bracket	BMB16244SL	TSRBS1625	BB716, BB724	25

OUTLET RETAINER

OR



Mounts standard outlets and wall switches in oversize openings, lending stability and preventing broken cover plates

Made from pre-galvanized steel

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Mounts Standard Outlets In Oversize Openings	OR	RLC	BB32	100

STUD & DRYWALL

BOX STABILIZER SUPPORT

FB0234DS



FB0234



Supports electrical boxes to stud
2 ½ thru 6" stud depths
Attaches to wood or metal studs

Description	Cross Reference			
	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
Box Support for 2½" and 3½"	FB023	H23, C23	BB423	100
Double Sided Box Support 2½" and 3½" Studs	FB023DS	TEB23	BB73	25
Heavy Duty Box Support 2½" and 3½" Studs	FB023HD	H23, C23	BB423D	100
Box Support for 2½", 3½" and 4" Studs	FB0234	H4, C4	BB44	100
Double Sided Box Support 2½", 3½" and 4" Studs	FB0234DS	MEB1	BB74	25
Box Support for 6" Stud	FB06	H6, C6	BB46	100

OLD WORK BOX SUPPORT

BST



Old work box mount
Holds switch boxes and outlets firmly in place
One-piece break-away design
Box is supported by drywall. No stud is necessary
Prevents box from pulling out of drywall

Description	Cross Reference			
	Minerallac PN	Caddy PN	B-Line PN	Std Pkg
Secures Electrical Box to Finished Drywall	BST	DSI2A	BB3L	100 Sets

STUD & DRYWALL

FAN BOX SUPPORT

NEW! FBST1624



Telescoping 16" to 24"

4" octagon box with clamps for flexible metal conduits

Bracket allows for easy positioning along studs or joists

Use with metal or wood studs

Load limit 70 lbs ceiling fan

110 lbs lighting fixture


Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
16 - 24" Fan Box Support PG	FBST1624	512HDFM70	BA500B24	5

A black and white photograph of a mechanical assembly, possibly a suspension system, featuring a thick, threaded metal rod and a black metal bracket. The background is blurred, showing other mechanical parts and a grid-like structure. A large black triangle is positioned in the upper right corner, containing the word "ACOUSTICAL" in bold red capital letters.

ACOUSTICAL

ACOUSTICAL

BOX TO T-BAR FASTENER

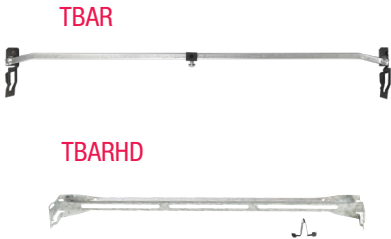

Snap-on 24" span box hanger for TBAR
 Pre-galvanized steel with Black Claw™
 spring steel
 Hardware included
 Load limit 20 lbs TBARA & TBAR
 Load limit 50 lbs TBARHD

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
24" T-Bar Box Bracket with 8" vertical adjustments	TBARA	512A	BA50A	50
24" T-Bar Box Bracket	TBAR	512	BA12	50
24" Heavy Duty T-Bar Box Bracket	TBARHD	512HD	BA50	25
3 5/8" Extension For TBARHD	TBARHDXT	512HDXT	BA50E	50

DROP WIRE CLIPS



EDWC is yellow for easy identifying of electric drop wire per NEC® 300.13

DWCS series provides supports conduit and cable from #12 - #8 drop wire

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
12-8 Ga Elec Drop Wire Clip PG	EDWC	EC311	BA311	100
14-2 to 12-3 MC/AC Drop Wire Clip SP	DWCS1	PCS1	BX8	100
1/2 & 3/4 EMT Drop Wire Clip SP	DWCS2	PCS2	BX18	100

ACOUSTICAL

LIGHTING SUPPORT ASSEMBLY

LSBAR



Snap-on 24" fixed span with adjustable fixture position

Installed with screwdriver

Pre-galvanized steel with Black Claw™ spring steel hardware

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Fits LIGHTOILER 5 and CALCULITE® Series Fixtures	LSBAR	520	BA20	25 Sets

LIGHTING TROFFER FASTENER

FT



Clip-on positive support for troffers and lay-in fixtures

Complies with 2011 NEC® 410.36 (B) means of support

Fits round or rectangular head T-Bars

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
T-bar Clip for Troffers	FT	515, 515A	BA15	100

T-BAR DROP WIRE CLIP

DWC1



T-BAR Support clip for drop wire

Includes wing nut washer

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Fits 1" T-BAR	DWC1	IDS	BA1	50


ACOUSTICAL

T-BAR HANGER CLIPS

SCX1W



SCT3



SCT2



Supports electrical fixtures to $1\frac{5}{16}$ " (SCT3) and up to 1" T-Bar (SCT2, SCX1W, SCX1XL)

Assembled with 1" OD wing nut washer

Ultimate static load limit:

50 lbs SCT3

75 lbs SCT2

100 lbs SCX1W & SCX1XL

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Twist-on $\frac{1}{4}$ "-20 x $\frac{5}{8}$ " Stud	SCT3	4G16	BA416	100
Two-piece $\frac{1}{4}$ "-20 x $\frac{5}{8}$ " Stud	SCT2	-	-	100
Scissor $\frac{1}{4}$ "-20 x $\frac{5}{8}$ " Stud	SCX1W	-	BAX416	50
Scissor $\frac{1}{4}$ "-20 x 2" Stud	SCX1XL	-	BAX41632	50

T-BAR FASTENERS

TB



TST



Positive method of supporting conduit and outlet boxes above acoustical T-Bar

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
With $\frac{1}{4}$ "-20 Thread Impression	TBT	ATA4I	BA64T	100
With $\frac{1}{4}$ " Plain Hole	TB	-	-	100

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
With $\frac{1}{4}$ "-20 Thread Impression	TST	ATS4I	BA54T	100
With $\frac{1}{4}$ " Plain Hole	TS	-	-	100

ACOUSTICAL

T-BAR FASTENERS FOR CONDUIT

TBKC38



Top mounted acoustical T-Bar fastener
Riveted assembly fits $\frac{3}{8}$ to 1 conduit
Supports conduit above T-Bar

Fits EMT	Fits Rigid/IMC	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
$\frac{1}{2}$	-	TB50	8PATA	BP8A6	100
$\frac{3}{4}$	$\frac{1}{2}$	TB75	12PATA	BP12A6	100
1	$\frac{3}{4}$	TB100	16PATA	BP16A6	100

Fits Conduit	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
$\frac{3}{8}$ or BX	TBKC38	6MATA	BG6A6	100
$\frac{1}{2}$, $\frac{3}{4}$	TBKC1234	812MATA	BG812A6	100
1	TBKC1	16MATA	BG16A6	100

ACOUSTICAL

T-BAR FASTENERS FOR CONDUIT

TS50




Top mounted acoustical T-Bar fastener
Riveted assembly fits $\frac{3}{8}$ to 1 conduit
Supports conduit above T-Bar

Fits EMT	Fits Rigid/ IMC	Cross Reference			Std Pkg
		Minerallac PN	Caddy PN	B-Line PN	
$\frac{1}{2}$	-	TS50	8PATS	BP8A5	100
$\frac{3}{4}$	$\frac{1}{2}$	TS75	12PATS	BP12A5	100
1	$\frac{3}{4}$	TS100	16PATS	BP16A5	100

Fits Conduit	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
$\frac{3}{8}$ or BX	TSKC38	6MATS	BG6A5	100
$\frac{1}{2}$, $\frac{3}{4}$	TSKC1234	812MATS	BG812A5	100
1	TSKC1	16MATS	BG16A5	100

HARDWARE

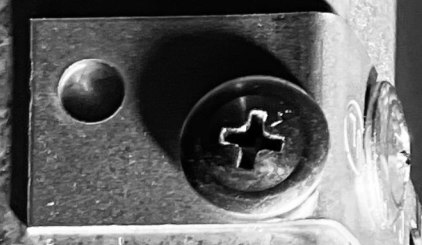

HARDWARE

BOX TO BAR FASTENER

BBC



Box to bar mounting clips for TBAR

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Box Mounting Clip with Screw	BBC	BHC	BB27	100

PIPE SLEEVE POSITIONER

NEW! M740



Positioning pipe sleeves and prevents movement during concrete pours

Use with schedule 40 and 80 pipe 2" to 6" sleeve diameter

Description	Cross Reference			Std Pkg
	Minerallac PN	Caddy PN	B-Line PN	
Hammer-On Pipe Sleeve Positioner	M740	740	BD40	100

WAFER HEAD LATH TEK SCREWS

26809-6



Wafer head provides a larger bearing surface

Phillips head

Zinc

Size	Driver Bit Size	Cross Reference			Job Jar
		Minerallac PN	Caddy PN	B-Line PN	Std Pkg
#8 x 1/2"	#2	26809-6	SMS8	BWHS9D	1000

HARDWARE

STANDOFF BRACKET

NEW! SBD



Provides minimum 1/2" standoff per NEC®300.4(E)
1/4" mounting holes

Description	Cross Reference			Std Pkg
	Minerallac Part #	Caddy PN	B-Line PN	
1/2" Standoff Bracket	SBD	CPNAM	BDH1	100

BRACKET

BA



BO



These components, used riveted to other Minerallac products, are available separately for a variety of applications
Pre-galvanized steel

Mounting Hole (in.)	Cross Reference			Std Pkg
	Minerallac Part #	Caddy PN	B-Line PN	
Angle Bracket				
1/4	BA	AB	BH7	100
Offset Bracket				
1/4	BO	A0	BH8	100

WING NUT WASHER

14WNW



Made from zinc plated steel

Wing Nut Washer	Cross Reference			Std Pkg
	Minerallac Part #	Caddy PN	B-Line PN	
Fits 1/4"-20 Bolt	14WNW	4WN	BA4WN	100

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
122	BF12	PH	43
123	BF13	P	43
350	BB1	SS	51
449	BX9	BXC	50
512	BA12	TBAR	59
520	BA20	LSBAR	60
740	BD40	M740	65
766	BB7	SBS	52
781	BX82	ARS	49
70824	BH1E24	R1814	24
70858	BH1E58	R51614	24
708912	BH1E912	R91614	24
1224TI	BH4F12	PH14T	45
1226T	BH5F12	PH1438N	45
1226TI	BH6F12	PH38T	45
12312P	BP12F13	P75	44
12316M	BG16F13	PKC1	44
12316P	BP16F13	P100	44
12320M	BG20F13	PKC114	44
1236M	BG6F13	PKC38	44
123812M	BG812F13	PKC1234	44
1238P	BP8F13	P50	44
12P	BP12	HIC75	5
12P24	BP12U24	BC1875	12
12P24SM	BP12E24	SFC1875	15
12P58	BP12U58	BC51675	12
12P58SM	BP12E58	SFC51675	15
12P912SM	BP12E912	SFC91675	15
12PATA	BP12A6	TB75	62
12PATS	BP12A5	TS75	63
12PF	BP12B5	SB75	52
16M	BG16	KC1	5
16M24	BG16U24	BC18KC1	13
16M24SM	BG16E24	SFC18KC1	16
16M58	BG16U58	BC516KC1	13
16M58SM	BG16E58	SFC516KC1	16
16M912	BG16U912	BC916KC1	13
16M912SM	BG16E912	SFC916KC1	16
16MATA	BG16A6	TBKC1	62
16MATS	BG16A5	TSKC1	63
16MB18, 16MB186	BG16S18W2, BG16S18W6	CBS18KC1APS	20
16MB1824	BG16S18U24	CBS18KC118	21
16MB1858	BG16S18U58	CBS18KC1516	21

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
16MB18A	BG16S18	CBS18KC1	18
16MB18CPNAM	BG16S18DH	CBS18KC1SBD	19
16MF	BG16B5	SBKC1	52
16P	BP16	HIC100	5
16P24	BP16U24	BC18100	12
16P24SM,6P24SM	BP16E24	SFC18100	15
16P58	BP16U58	BC516100	12
16P58SM	BP16E58	SFC516100	15
16P912SM	BP16E912	SFC916100	15
16PATA	BP16A6	TB100	62
16PATS	BP16A5	TS100	63
16PF	BP16B5	SB100	52
20M	BG20	KC114	5
20M24	BG20U24	BC18KC114	13
20M24SM	BG20E24	SFC18KC114	16
20M58	BG20U58	BC516KC114	13
20M58SM	BG20E58	SFC516KC114	16
20M912	BG20U912	BC916KC114	13
20M912SM	BG20E912	SFC916KC114	16
24M	BG24	KC112	5
24M24	BG24U24	BC18KC112	13
24M24SM	BG24E24	SFC18KC112	16
24M58	BG24U58	BC516KC112	13
24M58SM	BG24E58	SFC516KC112	16
24M912	BG24U912	BC916KC112	13
24M912SM	BG24E912	SFC916KC112	16
2BRT12, 2BRT20	BR12T, 2BR20T	634R	35
2H4	BE12	SFC332	40
304B2	BM3M	NPMS	49
32M	BG32	KC2	5
32M24	BG32U24	BC18KC2	13
32M24SM	BG32E24	SFC18KC2	16
32M58	BG32U58	BC516KC2	13
32M58SM	BG32E58	SFC516KC2	16
32M912	BG32U912	BC916KC2	13
32M912SM	BG32E912	SFC916KC2	16
35012P	BP12B1	SS75	50
35016M	BG16B1	SSKC1	50
35016P	BP16B1	SS100	50
350812M	BG812B1	SSKC1234	50
3508P	BP8B1	SS50	50
4BRT20	BR204T	646R	35
4BRT20WS	BR244W	646RW	35
4BRT32	BR324T	648R	35

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
4BRT32WS	BR324W	648RW	35
4BRT64	BR644T	654R	35
4G16	BA416	SCT3	61
4H24	BE24	SFC18	40
4H58	BE58	SFC516	40
4H912	BE912	SFC916	40
4TI	BH4	R14T	25
4TI24	BH4E24	R1814T	24
4TI58	BH4E58	R51614T	24
4TI912	BH4E912	R91614T	24
4TIB	BH4H7	RA14T	23
4WN	BA4WN	14WNW	66
4Z34, 6Z34	BW2, BW6	APS	8
4Z3412P, 6Z3412P	BP12W2, BP12W6	APS75	10
4Z3416M, 6Z3416M	BG16W2, BG16W6	APSKC1	9
4Z3416P, 6Z3416P	BP16W2, BP16W6	APS100	10
4Z34812M, 6Z34812M	BG812W2, BG812W6	APSKC1234	9
4Z348P, 6Z348P	BP8W2, BP8W6	APS50	10
512A	BA50A	TBARA	59
512HD	BA50	TBARHD	59
512HDFM70	BA500B24	FBST1624	57
512HDXT	BA50E	TBARHDXT	59
515,515A	BA15	FT	60
6A24	BH2E24	R1838	24
6A58	BH2E58	R51638	24
6A912	BH2E912	R91638	24
6AB	BH2H7	RA38	23
6M	BG6	KC38	5
6M24	BG6U24	BC18KC38	13
6M24SM	BG6E24	SFC18KC38	16
6M4I	BG64T	KC38T	5
6M58	BG6U58	BC516KC38	13
6M58SM	BG6E58	SFC516KC38	16
6M912	BG6U912	BC916KC38	13
6M912SM	BG6E912	SFC916KC38	16
6MATA	BG6A6	TBKC38	62
6MATS	BG6A5	TSKC38	63
6MB18, 6MB186	BG6S18W2, BG6S18W6	CBS18KC38APS	20
6MB1824	BG6S18U24	CBS18KC3818	21
6MB1858	BG6S18U58	CBS18KC38516	21
6MB18A	BG6S18	CBS18KC38	18
6MB18CPNAM	BG6S18DH	CBS18KC38SBD	19

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
6MF	BG6B5	SBKC38	52
6T	BH5	R1438N	25
6TB	BH5H7	RA1438N	23
6TI	BH6	R38T	25
6TI24	BH6E24	R1838T	24
6TI58	BH6E58	R51638T	24
6TI912	BH6E912	R91638T	24
6TIB	BH6H7	RA38T	23
708AB	BH1H7	RA14	23
766PMD,766PM	NA	DLS1	53
812M	BG812	KC1234	5
812M24	BG812U24	BC18KC1234	13
812M24SM	BG812E24	SFC18KC1234	16
812M4I	BG8124T	KC1234T	5
812M58	BG812U58	BC516KC1234	13
812M58SM	BG812E58	SFC516KC1234	16
812M912	BG812U912	BC916KC1234	13
812M912SM	BG812E912	SFC916KC1234	16
812MATA	BG812A6	TBKC1234	62
812MATS	BG812A5	TSKC1234	63
812MB18, 812MB186	BG812S18W2, BG812S18W6	CBS18KC1234APS	20
812MB1824	BG12S18U24	CBS18KC123418	21
812MB1858	BG812S18U58	CBS18KC1234516	21
812MB18A	BG812S18	CBS18KC1234	18
812MB18CPNAM	BG812S18DH	CBS18KC1234SBD	19
812MB18S	BG812S18S	CBS18KC1234ST	18
812MF	BG812B5	SBKC1234	52
8P	BP8	HIC50	5
8P24	BP8U24	BC1850	12
8P24SM	BP8E24	SFC1850	15
8P58	BP8U58	BC51650	12
8P58SM	BP8E58	SFC51650	15
8P912SM	BP8E912	SFC91650	15
8PATA	BP8A6	TB50	62
8PAT5	BP8A5	TS50	63
8PF	BP8B5	SB50	52
AB	BH7	BA	66
AF14	BF4	ABC25	42
AF144TI	BH4F4	ABC25R14T	45
AF146T	BH5F4	ABC25R1438N	45
AF146TI	BH6F4	ABC25R38T	45
AO	BH8	BO	66
ATA4I	BA64T	TBT	61

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
ATS4I	BA54T	TST	61
BC	BC1	500	39
BC12P	BP12C2	50075	40
BC12PSM	BP12C1	50075B	40
BC16M	BG16C2	500KC1	41
BC16MSM	BG16C1	500KC1B	41
BC16P	BP16C2	500100	40
BC16PSM	BP16C1	500100B	40
BC20M	BG20C2	500KC114	41
BC20MSM	BG20C1	500KC114B	41
BC24M	BG24C2	500KC112	41
BC24MSM	BG24C1	500KC112B	41
BC32M	BG32C2	500KC2	41
BC32MSM	BG32C1	500KC2B	41
BC812M	BG812C2	500KC1234	41
BC812MSM	BG812C1	500KC1234B	41
BC8P	BP8C2	50050	40
BC8PSM	BP8C1	50050B	40
BHC	BB27	BBC	65
CAT12	BCH12	J75	27
CAT1224	BCH12U24	J75BBC18	33
CAT1224SM	BCH12E24	J75SFC18	32
CAT124Z34, CAT126Z34	BCH12W2, BCH12W6	J75APS	30
CAT1258	BCH12U58	J75BBC516	33
CAT1258SM	BCH12E58	J75SFC516	32
CAT12912	BCH12U912	J75BBC916	33
CAT12912SM	BCH12E912	J75SFC916	32
CAT12AB	BCH12RB	J75B	27
CAT12AF14	BCH12F4	J75ABC	30
CAT12BC	BCH12C1	J75500	28
CAT12BC200	BCH12C442A	J75600	28
CAT12BC200B	BCH12C442	J75B600	29
CAT12BCB	BCH12C2	J75B500	29
CAT12VF14	BCH12F3	J75VBC	31
CAT2124, CAT21HP24	BCH21U24	J131BBC18	33
CAT2124SM, CAT21HP24SM	BCH21E24	J131SFC18	32
CAT214Z34, CAT21HP4Z34, CAT216Z34, CAT21HP6Z34	BCH21W2, BCH21W6	J131APS	30
CAT2158, CAT21HP58	BCH21U58	J131BBC516	33

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
CAT2158SM, CAT21HP58SM	BCH21E58	J131SFC516	32
CAT21912, CAT64HP912	BCH21U912	J131BBC916	33
CAT21912SM, CAT21HP912SM	BCH21E912	J131SFC916	32
CAT21AB, CAT21HPAB	BCH21RB	J131B	27
CAT21AF14, CAT21HPAF14	BCH21F4	J131ABC	30
CAT21BC, CAT21HPBC	BCH21C1	J131500	28
CAT21BC200, CAT21HPBC200	BCH21C442A	J131600	28
CAT21BC200B, CAT21HPBC200B	BCH21C442	J131B600	29
CAT21BCB, CAT21HPBCB	BCH21C2	J131B500	29
CAT21HP, CAT21	BCH21	J131	27
CAT21VF14, CAT21HPVF14	BCH21F3	J131VBC	31
CAT32,CAT32HP	BCH32	J200	27
CAT3224, CAT32HP24	BCH32U24	J200BBC18	33
CAT3224SM, CAT32HP24SM	BCH32E24	J200SFC18	32
CAT3258, CAT32HP58	BCH32U58	J200BBC516	33
CAT3258SM, CAT32HP58SM	BCH32E58	J200SFC516	32
CAT326Z34, CAT32HP4Z34, CAT324Z34, CAT32HP6Z34	BCH32W2	J200APS	30
CAT32912, CAT32HP912	BCH32U912	J200BBC916	33
CAT32912SM, CAT32HP912SM	BCH32E912	J200SFC916	32
CAT32AB, CAT32HPAB	BCH32RB	J200B	27
CAT32AF14, CAT32HPAF14	BCH32F4	J200ABC25	30
CAT32BC, CAT32HPBC	BCH32C1	J200500	28
CAT32BC200, CAT32HPBC200	BCH32C442A	J200600	28
CAT32BC200B, CAT32HPBC200B	BCH32C442	J200B600	29
CAT32BCB, CAT32HPBCB	BCH32C2	J200B500	29
CAT32VF14, CAT32HPVF14	BCH32F3	J200VBC25	31

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
CAT6424, CAT64HP24	BCH64U24	J400BBC18	33
CAT6424SM, CAT64HP24SM	BCH64E24	J400SFC18	32
CAT6458, CAT64HP58	BCH64U58	J400BBC516	33
CAT6458SM, CAT64HP58SM	BCH64E58	J400SFC516	32
CAT64912, CAT64HP912	BCH64U912	J400BBC916	33
CAT64912SM, CAT64HP912SM	BCH64E912	J400SFC916	32
CAT64AB, CAT64HPAB4	BCH64RB	J400B	27
CAT64AF14, CAT64HPAF14	BCH64F4	J400ABC	30
CAT64BC, CAT64HPBC	BCH64C1	J400500	28
CAT64BC200, CAT64HPBC200	BCH64C442A	J400600	28
CAT64BC200B, CAT64HPBC200B	BCH64C442	J400B600	29
CAT64BCB, CAT64HPBCB	BCH64C2	J400B500	29
CAT64HP, CAT64	BCH64	J400	27
CAT64VF14, CAT64HPVF14	BCH64F3	J400VBC	31
CER4	NA	CS4	6
CJ6	BRC6M, BRCJ	FCWS6	6
CPNAM	BDH1	SBD	66
CS16	BB38D	CS100	12
CS812	BB38	CS1234	12
CS812D	BB38D	CS1234D	12
D22 (Arlington)	NA	DR20	37
D33 (Arlington)	NA	DR30	37
D35 (Arlington)	NA	DR40	37
DSI2A,DS12A	BB33L	BST	56
EC311	BA311	EDWC	59
EC3114Z34, EC3116Z34	BA311W4, BA311W6	EDWCAPS	9
ESG1	BM2	G100	53
FB12P	BP12H7	BA75	49
FB6M	BG6H7	BAKC38	49
FB812M	BG812H7	BAKC1234	49
FB8P	BP8H7	BA50	49
FXC20	BX5	SBX	50
H23, C23	BB423	FBO23	56
H23,C23	BB423D	FBO23HD	56
H4,C4	BB44	FBO234	56

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
H6,C6	BB46	FB06	56
IDS	BA1	DWC1	60
J1A35	BF156	SBS3.5	52
K12	BW12	FS2	7
K16	BW16	FS3	7
K20	BW20	FS4	7
K8	BW8	FS1	7, 8
KX	BW4	FSBX	8
M24	BU24	BC18	39
M24S	BU24S	BC18ST	39
M58	BU58	BC516	39
M58S	BU58S	BC516ST	39
M912	BU912	BC916	39
M912S	BU912S	BC916ST	39
MAC2	BX4M	MCAC2	6
MAC224	BX4MU24	BC18MC2	14
MAC224SM	BX4ME58	SFC18MC2	17
MAC24Z34, MAC26Z34	BX4MW2, BX4MW6	APSMC2	9
MAC258	BX4MU58	BC516MC2	14
MAC258SM	BX4ME58	SFC516MC2	17
MAC2912	BX4MU912	BC916MC2	14
MAC2912SM	BX4ME912	SFC916MC2	17
MAC2BC	BX4MC2	500MC2	41
MAC2VF14	BX4MF3	VBCMC2	47
MCS100	BRC52	MCACS100	6
MCS10024	BRC52U24	BC18MCS100	14
MCS10058	BRC52U58	BC516MCS100	14
MCS100912	BRC52U912	BC916MCS100	14
MCS101BC200	BRC53C442	600BMCS101	41
MCS101	BRC53	MCACS101	6
MCS50	BRC51	MCACS50	6
MCS5024	BRC51U24	BC18MCS50	14
MCS504Z, MCS506Z	BRC51W2, BRC51W6	MCACS50APS	9
MCS5058	BRC51U58	BC516MCS50	14
MCS50912	BRC51U912	BC916MCS50	14
MEB1	BB74	FB0234DS	56
MFS	BB6A	SBC	51
MP1	BB10	WB1	34
MP1P	BB10P	WBF1P	34
MP1S	BB15	WB1S	34
MP2	BB20	WB2	34
MP2S	BB25	WB2S	34
MPAL2	NA	WBF2P	34

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
MPLS	BB10L	WBF1	34
MPLS2	BB20L	WBF2	34
MSF	BB9	S1900	51
MSR24	BH24R	PSF18R	25
MSR58	BH58R	PSF516R	25
MSR912	BH912R	PSF916R	25
MSS24	BH24	PSF18	25
MSS58	BH58	PSF516	25
MSS912	BH912	PSF916	25
NA	BX4C2	500MC1	41
NA	BR163W	634RW	35
NA	NA	646RS	36
NA	NA	646RWS	36
NA	BRS32A	648RS	36
NA	NA	648RSS	35
NA	NA	648RWS	36
NA	BRS64A	654RS	36
NA	NA	ABC25PS	43
NA	NA	ABC25PSR	43
NA	NA	BB4SFB	53
NA	NA	BRS15	36
NA	BRS32	BRS2	36
NA	BP16S18	CBS18HIC100	19
NA	BP16S18U24	CBS18HIC10018	21
NA	BP16S18U58	CBS18HIC100516	21
NA	BP16S18W2, BP16S18W6	CBS18HIC100APS	20
NA	BP16S18S	CBS18HIC100ST	19
NA	BP8S18	CBS18HIC50	19
NA	BP8S18U24	CBS18HIC5018	21
NA	BP8S18U58	CBS18HIC50516	21
NA	BP8S18W2, BP8S186W	CBS18HIC50APS	20
NA	BP8S18S	CBS18HIC50ST	19
NA	BP12S18	CBS18HIC75	19
NA	BP12S18U24	CBS18HIC7518	21
NA	BP12S18U58	CBS18HIC75516	21
NA	BP12S18W2, BP12S18W6	CBS18HIC75APS	20
NA	BP12S18S	CBS18HIC75ST	19
NA	BG16S18S	CBS18KC1ST	18
NA	BG6S18S	CBS18KC38ST	18
NA	BF1	FH116	42
NA	BF2	FH532	42

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
NA	BRC1, CS14 (Arlington), BPSTCKR (Ideal), MCS20W (G&B)	FS4NMB	6
NA	NA	FS5MC	6
NA	BRC2, CS2 (Arlington)	FS6NMB	6
NA	NA	MCOSS	6
NA	BHF12R	PHPS	43
NA	BHF12	PHPSR	43
NA	BHE12	PSF332	25
NA	BH12R	PSF332R	25
NA	BH4F1	RF11614T	46
NA	BH6F1	RF11638T	46
NA	BH4F2	RF53214T	46
NA	BH6F2	RF53238T	46
NA	NA	RSB162PG	10
NA	BF196	SBS6	52
NA	NA	SCT2	61
NA	BAX416	SCX1W	61
NA	BAX41632	SCX1XL	61
NA	NA	TB	61
NA	NA	TS	61
PCS1	BX8	DWCS1	59
PCS2	BX18	DWCS2	59
PHSW4	NA	PCSW25	45
PHSW6	NA	PCSW37	45
PSF10C	DB10	RSB081PG	10
PSF10D	DB610	RSB244PG	10
RBS16	BB8-16	BMB164S3P	55
RBS24	BB824	BMB244S4P	55
RLC	BB32	OR	55
SC2A	BXS67	F2A	11
SC2B	BXS89	F2B	11
SC2C	BXS1011	F2C	11
SC2D	BXS1214	F2D	11
SC2E	BXS1519	F2E	11
SC2F	BXS2024	F2F	11
SC2G	BXS2530	F2G	11
SC4A	BXM67	F4A	11
SC4B	BXM89	F4B	11
SC4C	BXM1011	F4C	11
SC4D	BXM1214	F4D	11
SC4E	BXM1519	F4E	11

COMPETITOR CROSS INDEX

Caddy PN	B-Line PN	Minerallac PN	Page
SC4F	BXM2024	F4F	11
SC4G	BXM2530	F4G	11
SC8A	BXL67	F8A	11
SC8B	BXL89	F8B	11
SC8C	BXL1011	F8C	11
SC8D	BXL1214	F8D	11
SC8E	BXL1519	F8E	11
SC8F	BXL2024	F8F	11
SC8G	BXL2530	F8G	11
SGB16A	BB216	BMB16	54
SGB16A*	BB216D	BMB16D	54
SGB24A	BB224	BMB24	54
SGB24A*	BB224D	BMB24D	54
SMS8	BWHS9D	26809-6	65
TEB23	BB73	FBO23DS	56
TLSGDR1	BB2TSC	BMBTSLDR	54
TSGB16	BB216T	BMB16T	54
TSGB1624	NA	BMB1624T	54
TSGB24	BB224T	BMB24T	54
TSRBS1625	BB716, BB724	BMBT16244SL	55
VF14	BF3	VBC25	42
VF144TI	BH4F3	VBC25R14T	46
VF146T	BH5F3	VBC25R1438N	46
VF146TI	BH6F3	VBC25R38T	46
WMX3	BX2	WBX3	23
WMX6	BX6	WBX6	23

STRONG
SWIFT
EFFICIENT



BlackClaw™

By **Minerallac**Company